



HORIZONTAL EXIT

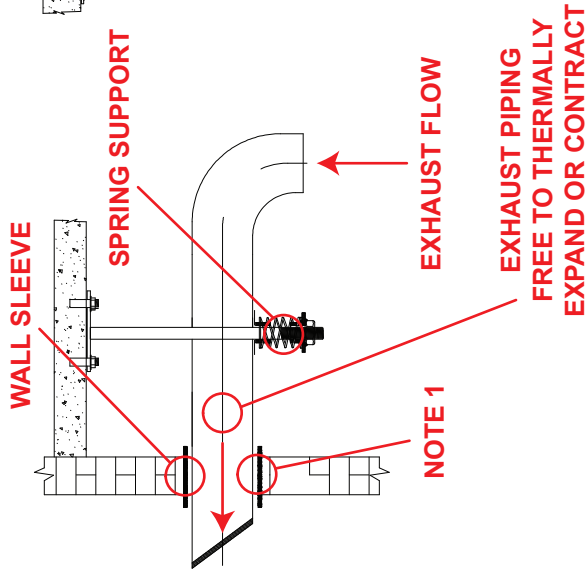

VERTICAL EXIT

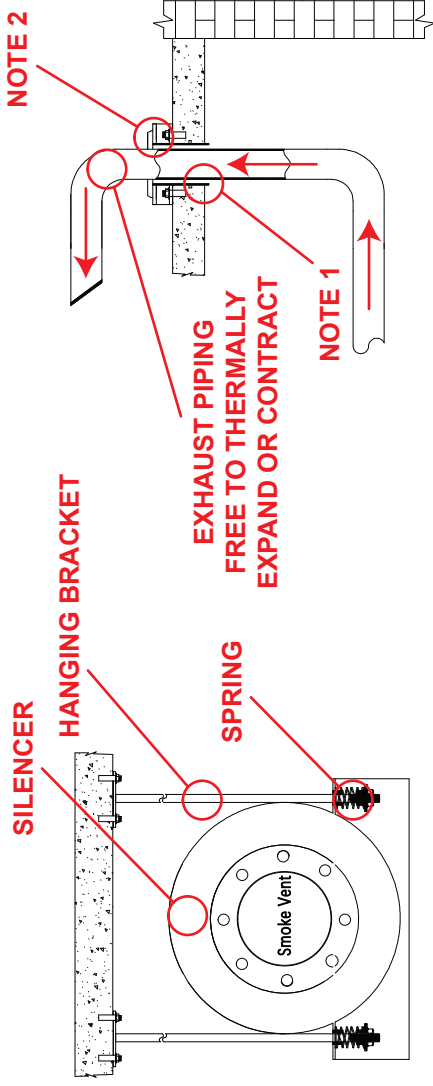

NOTES:

1. AMERIFLO RECOMMENDS A MINIMUM SPACING BETWEEN THE EXHAUST PIPING AND THE WALL SLEEVE OF 0.250 [5].
2. VERTICAL EXHAUST EXIT MUST BE WATERPROOF WITH PROPER SUPPORT AND CAP INSTALLED. FOLLOW LOCAL BUILDING CODES.

REV	UNITS	AMERIFLO									
	[IN/MM]										
		DRW BY:	DATE:	NAME:	EXHAUST SUPPORT	PROJECTION:					
		MJF	09/01/2020		DETAIL						
A		CREATION	09/01/2020	CHK BY:	DATE:	PROJECT:					
REV		DESCRIPTION	DWN	APVD	DATE	PART NO.: EXSUP-00					
						MATERIAL:					
						SCALE:	PAGE	OF			
						NONE	1	1			