




MODEL

**SERIES 4770 ST
SUBMERSIBLE TURBINE**

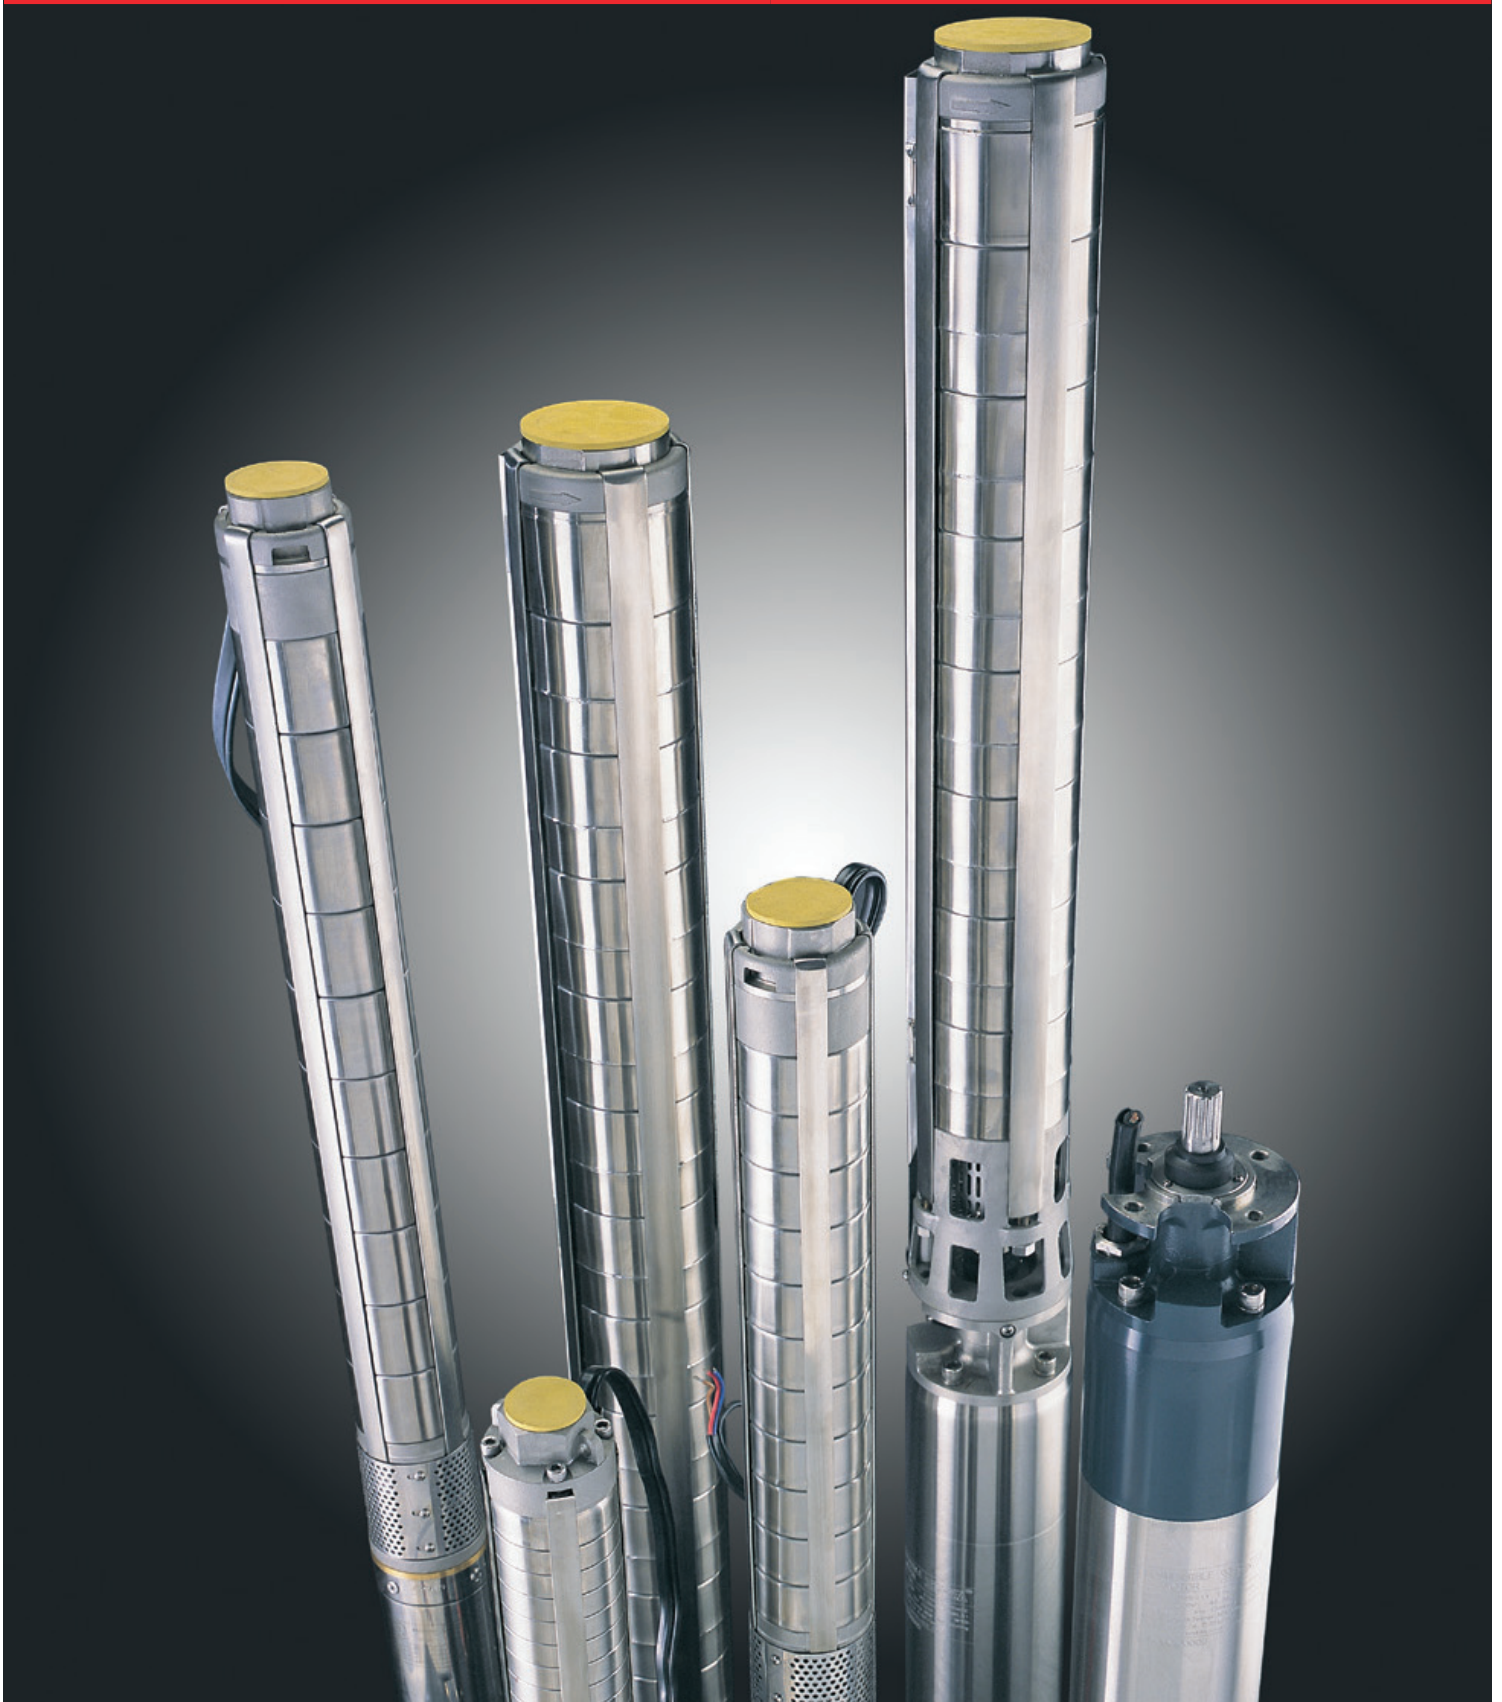

AMERIFLO
4034 Mint Way, Dallas, TX 75237
www.ameriflo-usa.com

SERIES 4770 ST SUBMERSIBLE TURBINE PRODUCT LINE
©2021 AMERIFLO

SERIES 4770

MODEL ST

CLOSE-COUPLED SUBMERSIBLE TURBINE

Sizes: 1.25" to 6" Discharge

Flows: 1 GPM to 1,148 GPM

Heads: 10 PSI to 412 PSI

Temp: To 104°F

Services:


Fire Protection
Water Well

EXTERIOR SHELL

- Supplied standard in 304 stainless steel
- Optional 316 stainless steel construction available upon request

LOWER PUMP HOUSING

- Supplied standard in 304 stainless steel
- Optional 316 stainless steel construction available upon request
- NEMA motor connection allowing the use of 4, 6, 8 & 10 inch motors from a variety of submersible motor manufacturers
- Integral strainer protects the pump assembly from debris that may be present in the pumped fluid

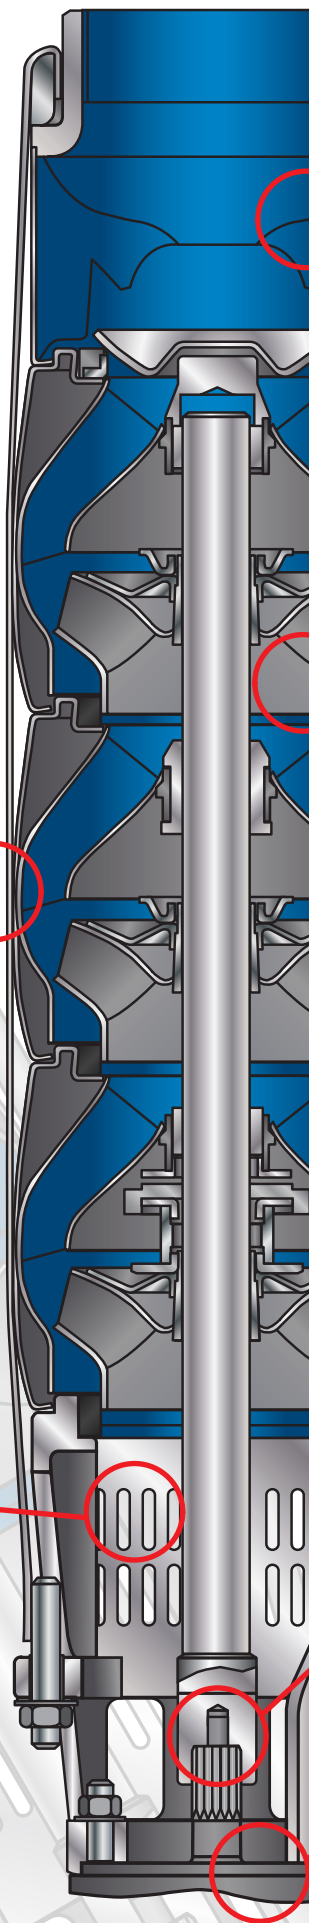



TOP END BELL

- Supplied standard in 304 stainless steel
- Optional 316 stainless steel construction available upon request
- Internal, heavy duty, non-spinning, spring loaded stainless check valve protects the pump from reverse rotation and water hammer
- Threaded NPT connection for easy system connection

IMPELLER/DIFFUSER STACK

- Supplied standard in 304 stainless steel
- Optional 316 stainless steel construction available upon request
- Impellers and diffusers are designed for maximum efficient
- Wide variety of bearing construction based on fluid and application
- Oversized and heavy duty 420 stainless steel shaft designed for unplanned loads


COUPLING

- NEMA splined motor shaft connection for easy assembly and disassembly

DRIVER

- Pump motor bracket is designed for a standard, stocked NEMA motor
- Wide variety of motor enclosures available including ODP, TEFC
- IEC motors available upon request

ST 2900 RPM OPERATING RANGE

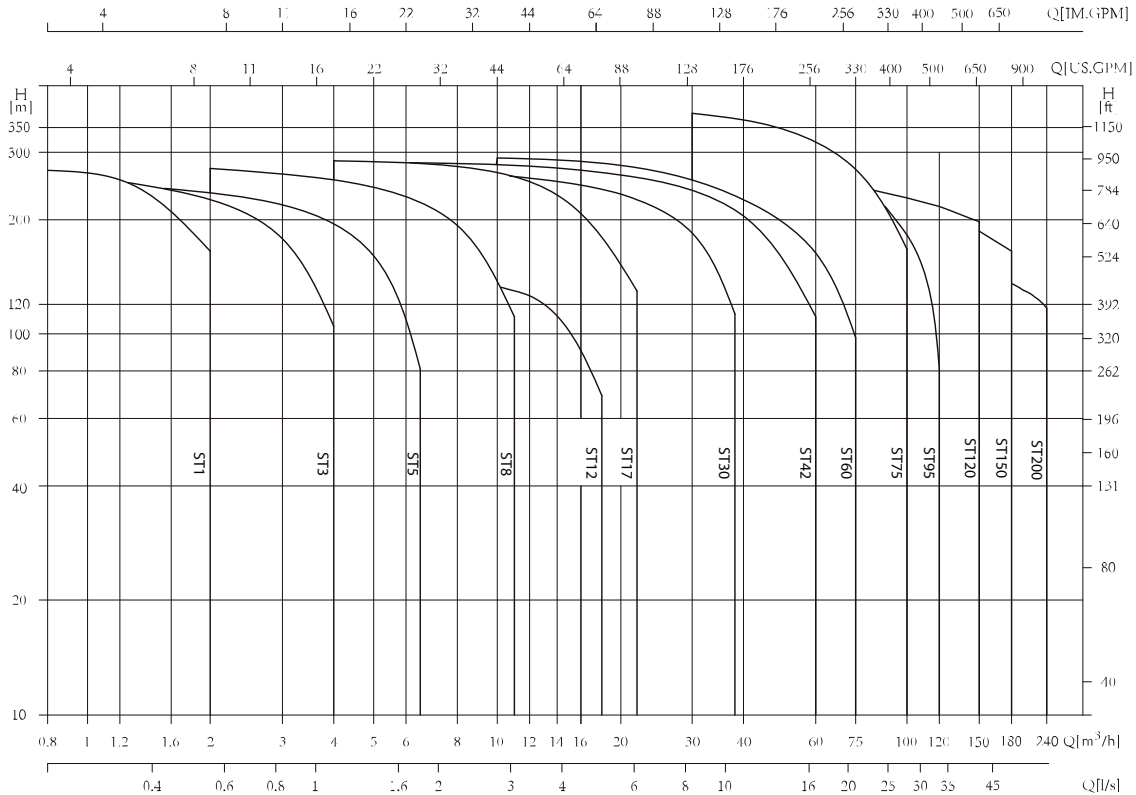

ST 3500 RPM OPERATING RANGE

