


INCLUDED ACCESSORIES

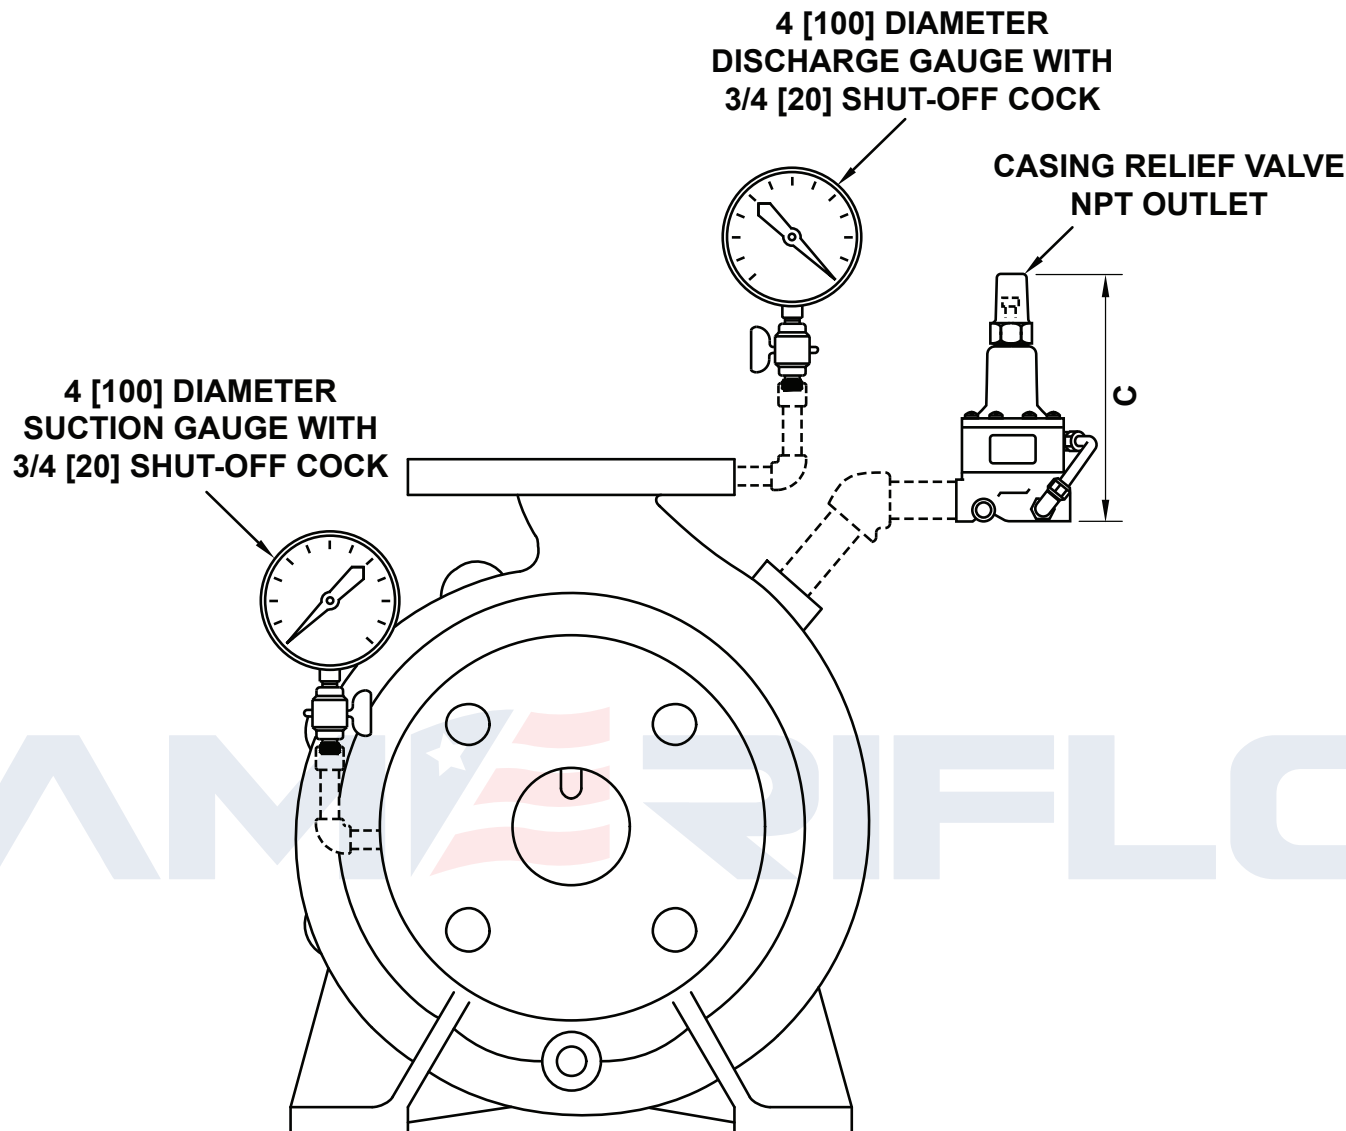

CASING RELIEF VALVE

PUMP FLOW (GPM)	VALVE INLET	"C" DIMENSION
50 - 2500	1/2"	7.438 [190]
3000 - 5000	3/4"	7.438 [190]

NOTES:

- ❶ ALL DIMENSIONS ARE IN INCHES [MM] AND MAY VARY ± 0.375 INCHES.
- ❷ REFER TO AMERIFLO INSTALLATION, OPERATION AND MAINTENANCE MANUAL FOR PROPER PUMP INSTALLATION.
- ❸ ACCESSORIES ARE SHIPPED LOOSE FOR FIELD INSTALLATION.
- ❹ CASING RELIEF VALVE IS FURNISHED ON ELECTRIC MOTOR DRIVEN PUMPS ONLY.
- ❺ SUCTION GAUGE RANGE IS -14.5 - 0 - 130 PSI FOR SUCTION PRESSURE UP TO 75 PSI OR 30" - 0 - 300 PSI FOR SUCTION PRESSURE ABOVE 75 PSI.
- ❻ DISCHARGE GAUGE IS 0 - 300 PSI FOR PUMPS WITH RATED DISCHARGE PRESSURE UP TO 150 PSI OR 0 - 600 PSI FOR PUMPS WITH RATED PRESSURE OVER 150 PSI.
- ❼ THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED BY AMERIFLO.