


## INCLUDED ACCESSORIES

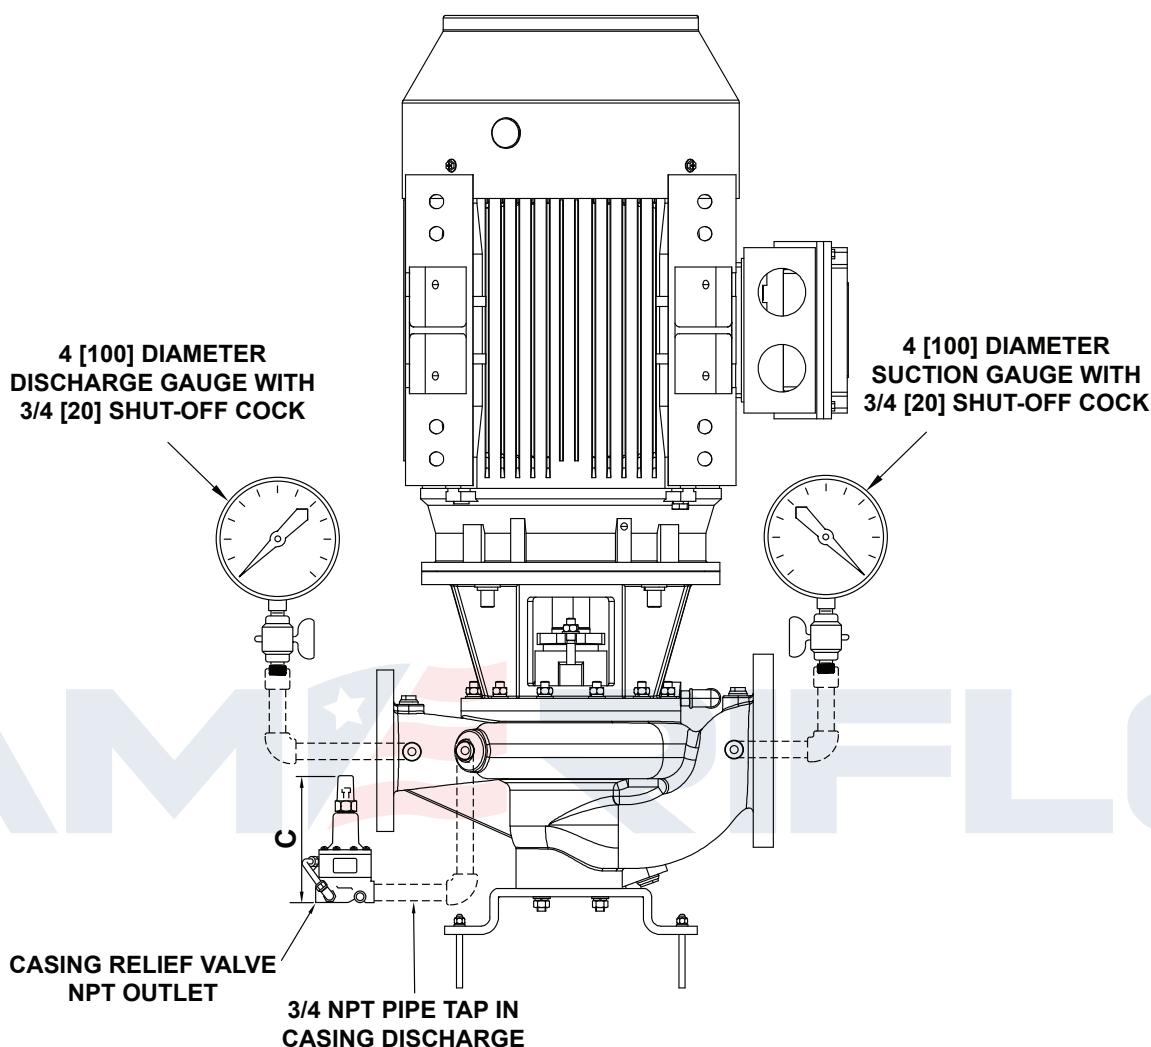

### CASING RELIEF VALVE

PUMP FLOW (GPM)	VALVE INLET	"C" DIMENSION
50 - 1500	1/2"	7.438 [190]

### FLOAT OPERATED AIR RELEASE VALVE

SYSTEM PRESSURE (PRESSURE)	HEIGHT	WIDTH
UP TO 175 PSI	12.438 [316]	7.500 [191]
OVER 175 PSI	12.438 [316]	7.500 [191]

#### NOTES:

- ❶ ALL DIMENSIONS ARE IN INCHES [MM] AND MAY VARY  $\pm 0.375$  INCHES.
- ❷ REFER TO AMERIFLO INSTALLATION, OPERATION AND MAINTENANCE MANUAL FOR PROPER PUMP INSTALLATION.
- ❸ ACCESSORIES ARE SHIPPED LOOSE FOR FIELD INSTALLATION.
- ❹ CASING RELIEF VALVE IS FURNISHED ON ELECTRIC MOTOR DRIVEN PUMPS ONLY.
- ❺ DISCHARGE GAUGE IS 0 - 300 PSI FOR PUMPS WITH RATED DISCHARGE PRESSURE UP TO 150 PSI OR 0 - 600 PSI FOR PUMPS WITH RATED PRESSURE OVER 150 PSI.
- ❻ THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED BY AMERIFLO.