

3620 Series
HH(4) & HH(6)
Four & Six-Stage Split
Case



Flows to: 800 GPM

Heads to: 2,100 Feet

Temperatures to: 500°F

# SERIES 3620 MODEL HH(4&6)

FOUR & SIX-STAGE STAGE
FLEX-COUPLED SPLIT CASE

Sizes: 1.5" to 4" Discharge

Flows: To 800 GPM Heads: To 2,100 Feet

Temp: To 500°F

# Services:

Cooling Water
Condenser Circulating
Boiler Feed
Industrial Process

# SHAFT ASSEMBLY

- 420 stainless steel shaft is stronger than standard carbon steel and has superior corrosion resistance
- Designed and sized specifically for the aggressive fire protection markets

# CASE WEAR RINGS

- Supplied in standard bronze or other specified alloy
- Case wear rings are renewable which will renew factory running clearances and performance
- Machined in a proprietary process eliminating pins to prevent rotation during operation

# **ROTATING ASSEMBLY**


- Includes investment cast, 304 stainless steel, single suction impeller
- Modular design maximizes the sharing of common components
- 304 stainless steel shaft sleeves completely protect the shaft from wear and corrosion
- 304 stainless steel gland assemblies ensure that packing can be adjusted without the worry of corrosion
- Tongue & groove style design for throat bushings, stage pieces and all case wear rings keep pressure losses at a minimum
- 304 stainless steel shaft sleeve nuts are located outside of the fluid chamber minimizing corrosion and allowing for an easier disassembly when the need for service arises

### CASING

- Supplied standard in ASTM A48 class 30 cast iron
- Heavy wall thickness for corrosion allowance and high pressure applications
- Centerline supported for extremely high temperature applications
   Horizontally split to permit complete access to the rotating assembly
- Casing assembly design features pry bar locations at each quadrant as well as jackscrews to aid in the casing top removal
- Double volute design on both stages significantly reduces radial loads on shafting and allows for a more compact & efficient design
- Cast integral vortex suppressor in casing top at each impeller eye designed to reduce vortexing of fluid prior to it entering the impeller
- Threaded taps for gauges and pressure relief valve
- Dedicated cast support for the nameplate allows for a high visibility design
- Suction & discharge gauge package with 304 stainless steel buffer tube, fittings and ball valves
- Suction and discharge flanges supplied in 250 PSI rating with raised face for high pressure applications

#### SHAFT SEALING

- Wide variety of packing available and supplied standard
- Component, single cartridge and/or double cartridge mechanical seals can be supplied upon request

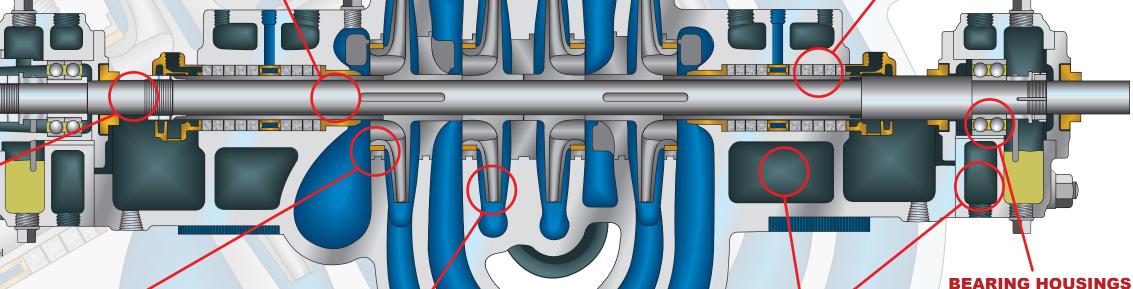

# **IMPELLERS**

- Supplied standard in investment cast, 304 stainless steel
- Opposed impeller design allows for hydraulically balanced roto with broad band, high efficiency performance
- · Machined and dynamically balanced prior to assembly

**WATER JACKETS** 

applications

housing

leakage

Water cooled seal chamber

Bearing housing features a

and bearing housing ensure

lower operating temperatures

in high temperature boiler feed

water passage around the split

water can penetrate the bearing

housing ensuring no cooling

- Cartridge style bearings are completely removable and replaceable without the need for casing top removal
   Both inboard & outboard bearings can
- Both inboard & outboard bearings can be inspected and replaced without the need for complete pump disassembly
- Designed for a minimum 50,000 hour bearing life using 5300 series, double row, deep groove inboard and 7300 series duplex, angular contact outboard bearings provide superior axial and radial support
- Ring-oiled lubrication skims clean oil from the surface of the oil sump for superior lubrication





#### How It All Began EFFICIENCY BY DESIGN

With years of manufacturing experience, Ameriflo has spent considerable time developing what the customer has asked for. The most diverse hydraulic offering in the split case markets with an emphasis on pump efficiency and systems integration. Ameriflo manufactures all product type in a wide variety of standard and optional materials offering you the solution you need.

Ameriflo is a global manufacturer of integrated systems with facilities located in several countries and has clients in over 80 countries. The corporate manufacturing headquarters is located in Tennessee, along with a very large testing and training facility for distributor and representative training.

Ameriflo uses computational fluid dynamics (CFD)and 3D Solids Works for designing all pumps and systems with detail for all valves, suction & discharge piping and any installed optional accessories specified by the end user. Electric and Diesel engine driven systems are available and can be ordered in a variety of flows and pressures with full optional metallurgy support.

#### **Product Line**

The benefit to the Ameriflo offering is that you only need to go to one place for your product line needs. Whether your need is an end suction pump, a large split case or even a vertical turbine Ameriflo has a model for you. Each product line has a very diverse offering from the very small to the very large and everything in between. Do not rely on other manufacturers who have broken product lines with missing models.

Ameriflo also has state-of-the are engineered customer service. The applications engineering



part of Ameriflo have decades of engineering and specification work. This background and experience is critical when the design engineer is looking for answers to questions.

Ameriflo has one of the largest test facilities in North America with nearly 300,000 gallons of water utilizing 8 different test loops from 2 inch through 36 inch. The horizontal and vertical test labs have ratings up through 1,000 HP and include string test stands allowing testing with the job motor or Diesel engine.

# **Communication Is The Key To Our Success**

Ameriflo has systems in place making communication with our clients of the utmost priority. Each client has their own customer portal that will allow them to check on all quotations, sales orders and any client case that is generated. These tools put the power in the hands of the client and allow them access to the most current information. This access empowers our clients to respond to their customers in a more timely fashion and secure that next opportunity!

Ameriflo also has a dedicated theater used for sales and service

training. This theater can house approximately 35 students and is used to cover the Ameriflo pump and Diesel engine product lines. Schools are available to sales people and dedicated service schools are also offered. Service schools feature a hands on portion allowing students to disassemble and re-assemble pumps and/or Diesel engines to allow for certified repairs in the field. Contact Ameriflo to inquire about the next school and how you can join in these events.

Ameriflo also has a state-of-the-art software selection package with full configuration, *Ameriflo IQ*, that can be used by simply signing up. E-mail us for additional information.

If you would like more information about what Ameriflo is all about, please contact us.

What separates Ameriflo from the competition, *WE DELIVER*.....

# **Ameriflo Corporation**

125 Morrison Road Rossville, TN 38066 Phone: (888) 301-6311 www.ameriflo-usa.com

support@ameriflo-usa.com

3620 HH(4&6) Four & Six-Stage Split Case 07/01/2023 Revision 1A